


**Replace acetylene, propane and other fuel gases with G-TEC**

# TB-15 / TB-30 Torch Boosters

**Boost standard utility natural gas service as high as 25 psi  
for almost any flame torch application!**

**Get Superior Performance  
With High-Pressure Natural Gas!**

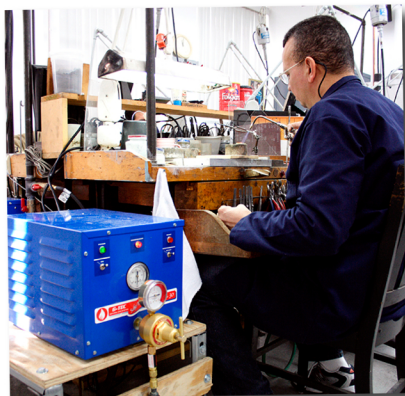

*A high pressure natural gas flame is hot and clean  
easier on your eyes and with a G-TEC Torch Booster  
you never run out of gas!*



*G-TEC Torch Boosters do not require special site preparation,  
they are quiet and can be installed "anywhere".*

#### **Dimensions & Weight**

Width - 12", Height - 12", Depth - 16"

Weight - TB-15 - 48 LB / TB-30 50 LB

#### **Electric Power**

TB-15 and TB-30 Systems operate on 120V

60Hz 15 amp electrical power

#### **Gas Supply Line**

Use 1/2" steel pipe to supply <1 LB natural gas to  
the Torch Booster. Flexible 5' hose and shutoff  
valve are included

#### **Environmental Requirements**

Ambient temperature should be between 40-90F



TB-15 and TB-30 Torch Boosters replace acetylene, propane and other fuel gases in cylinders and provide a steady supply of 25 psi natural gas directly from your standard utility gas line.

**Cut fuel gas costs by up to 80%**  
**Never run out of gas in the middle of a job**  
**Don't waste time changing cylinders**  
**Get superior torch performance**  
**Eliminate stored gas tanks - make your workplace safer**

Connect TB-15/TB-30 to a single torch, shop manifold or automated equipment. Once started Torch Boosters supply all the gas you need all day and automatically adjust as torches are turned on and off, without operator attention. Turn it on for the first shift and off at the end of the day. TB-15 Torch Booster supplies high pressure natural gas at 15 cubic feet per hour; TB-30 Torch Booster supplies high pressure natural gas up to 40 cubic feet per hour. An external regulator can be attached to set pressure between 1-25 psi. Most torches need only a simple tip change to switch to natural gas!

Typical applications for the TB-15 Torch Booster are small glass lampworking torches and jeweler's bench torches. TB-30 Torch Boosters can be used for up to jeweler's 6 bench torches or 1 casting torch or for up to 3 "minor" size glass lampworking torches.

Certified by CSA International for performance, reliability and safety G-TEC Torch Boosters are welcomed everywhere in North America, even buildings where acetylene and propane cylinders are prohibited. G-TEC Torch Boosters are compact, quiet do not require ventilation or other site preparation and are normally installed right in the area where high pressure natural gas will be used.



800-451-8294

[www.gas-tec.com](http://www.gas-tec.com) / [info@gas-tec.com](mailto:info@gas-tec.com)

