

Replace acetylene, propane and other fuel gases with G-TEC


TB-30 Torch Boosters

**Boost standard utility natural gas service as high as 25 psi
for cutting steel, brazing, heating - almost any flame torch application!**

**Get Superior Performance
With High-Pressure Natural Gas!**



Natural gas makes clean cuts with little slag, square corners and a smooth cut face

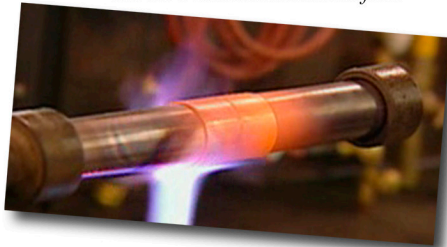

Brazers say a natural gas torch has better control and a more forgiving flame yet still provides plenty of heat



Natural gas can be used at any pressure and there are no valve icing problems when you heat with natural gas



TB30 Torch Boosters replace acetylene, propane and other fuel gas cylinders and provide a steady supply of 25 psi natural gas directly from your standard utility gas line.

- ◆ **Cut fuel gas costs by up to 80%**
- ◆ **Don't waste time changing empty cylinders**
- ◆ **Get superior torch performance**
- ◆ **Help your employees be more productive**

Connect your Torch Booster to a single torch, shop manifold or automated equipment. Once started Torch Boosters supply all the gas you need all day without further operator attention. Just turn it off at the end of the day.

TB-30 Torch Booster supplies high-pressure natural gas at 30 cf/hr and is the right choice for a single cutting or brazing torch. An external regulator can be attached to set pressure between 1-25 psi.

Most torches need only a simple tip change to switch to natural gas!

Dimensions & Weight

Width - 12", Height - 12", Depth - 16"
Weight - TB-30 50 LB

Electric Power

TB-30 Systems operate on 110V
60Hz 15 amp electrical power

Gas Supply Line

Use 1/2" steel pipe to supply <1 LB natural gas to the Torch Booster. Flexible 5' hose and shutoff valve are included

Environmental Requirements

Ambient temperature should be between 40-90F



800-451-8294

www.gas-tec.com / info@gas-tec.com

